


PROPERTY LINE →

REDUCED PRESSURE PRINCIPLE DETECTOR (RPDA) BACKFLOW PREVENTION ASSEMBLIES SHALL BE ASSE 1047 AND USC APPROVED, AND .025% LEAD FREE. ALL PIPE AND FITTINGS USED INSIDE THE ENCLOSURE SHALL BE IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND THE MOST CURRENT VERSION OF THE INTERNATIONAL PLUMBING CODE AS ADOPTED BY THE COMMONWEALTH OF VIRGINIA; THE ASSEMBLY SHALL ALSO BE PROPERLY RESTRAINED (BRACED).

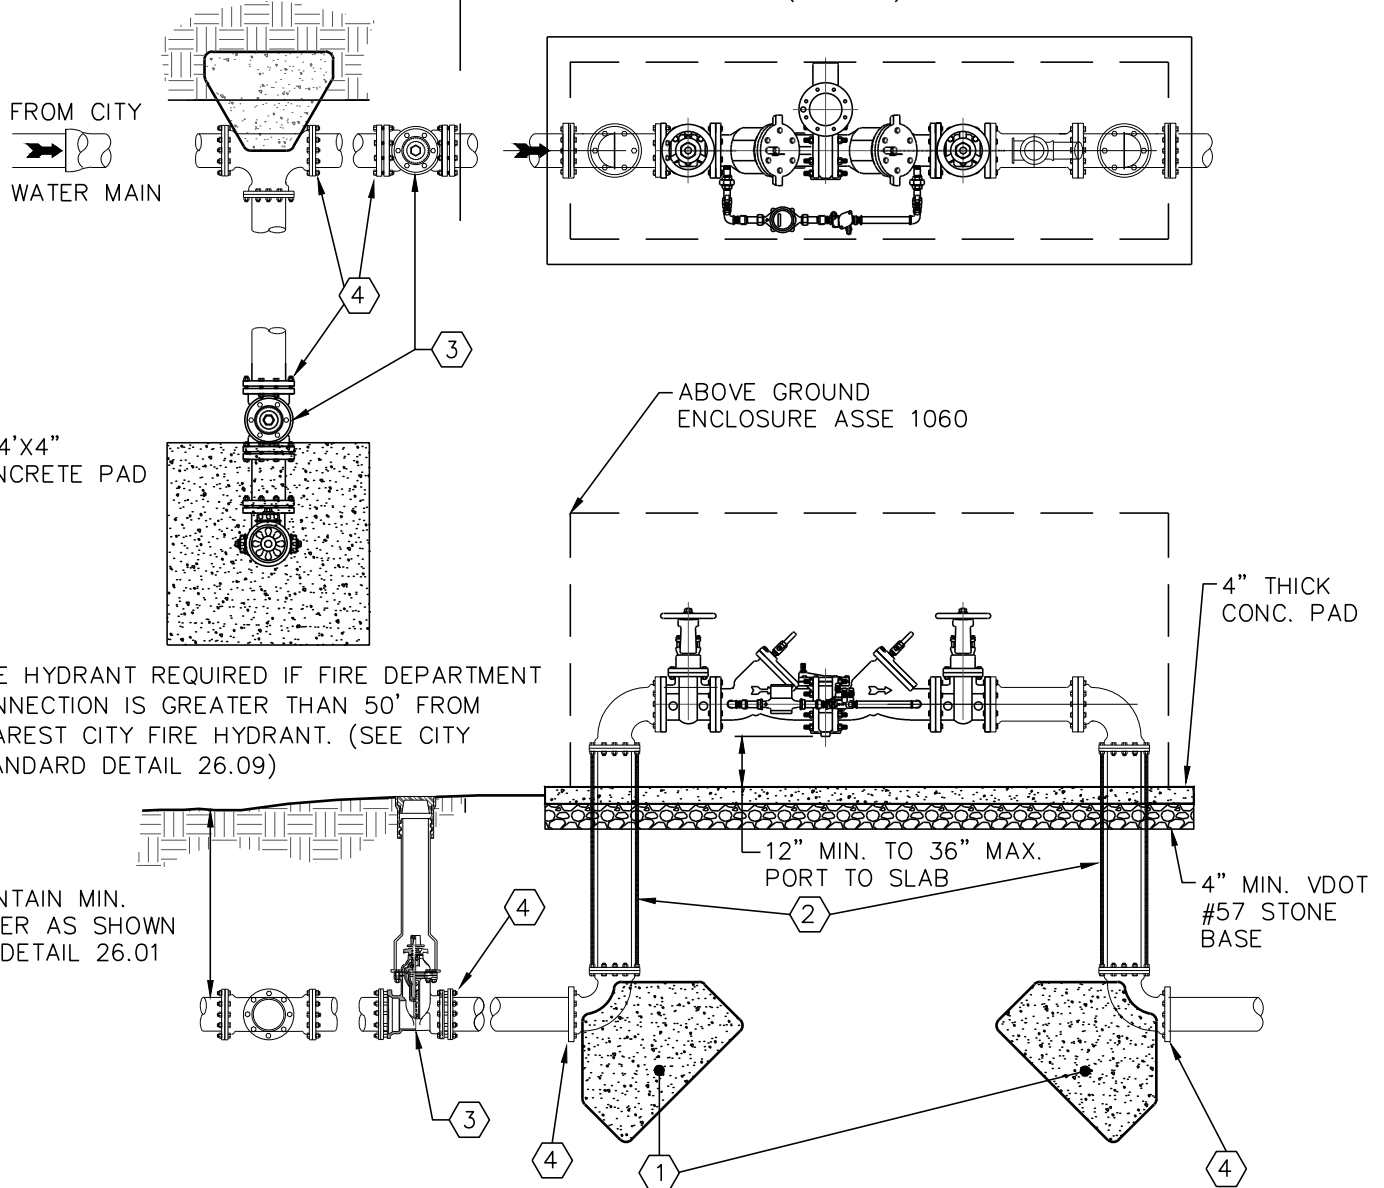

## THE CITY OF LYNCHBURG

RPDA—FOR INDEPENDENT FIRE SERVICE  
OR PRIVATE HYDRANT INSTALLATION

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:  
NOT TO SCALE

REVISION DATE:  
12-12-2014

DETAIL #  
**26.20A**

SHEET #:  
1 OF 3